

RG-EG105GW-X

Wi-Fi 6 AX3000 Wireless All-in-One Business Router

DATASHEET



Highlights

- A professional and high performance Wi-Fi 6 business router.
- Full Wi-Fi coverage with 5 high gain external antennas.
- Press button, Reyee Mesh networking done.
- Rich enterprise-grade features for business scenarios.
- Securely monitoring the NVR/IPC/internal server anytime from anywhere.

Highlight Features

Best-in-class All-in-One Wireless Router

A professional and high performance Wi-Fi 6 wireless router for small size businesses.



Wi-Fi 6
AX3000



5 * 5dBi
Antenna



Reyee
Mesh



4 WAN
Load Balancing



IPSec, OpenVPN,
L2TP, PPTP, etc.





Free Cloud
Management

Enter the Era of Ultra-high Wi-Fi 6 Speed

With a revolutionary combination of **OFDMA** and **1024QAM**, the latest **802.11ax** standard, and the **160MHz** band,

RG-EG105GW-X wireless aggregation rate reaches 2.976Gbps.

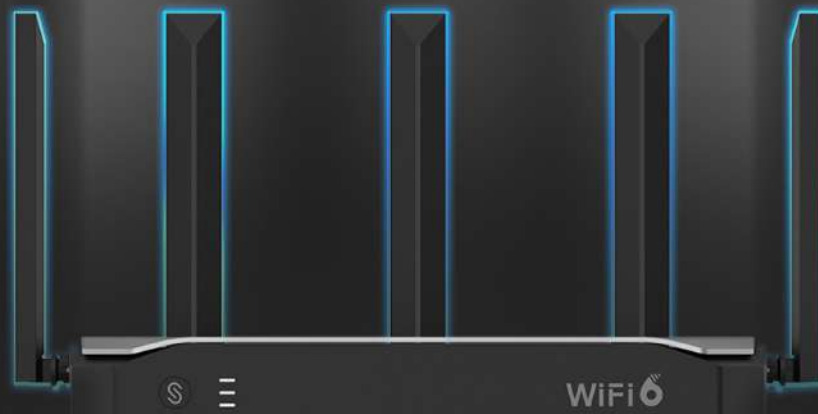

Highlight Features

Power On, Business On

Easy to set up the whole network with all-in-one wireless router by mobile APP.



Press Button, Reyee Mesh Networking Done


Less wiring, more relaxing.




Highlight Features

New Efficient Way of Application/Bandwidth Management

Application Based Bandwidth Policy

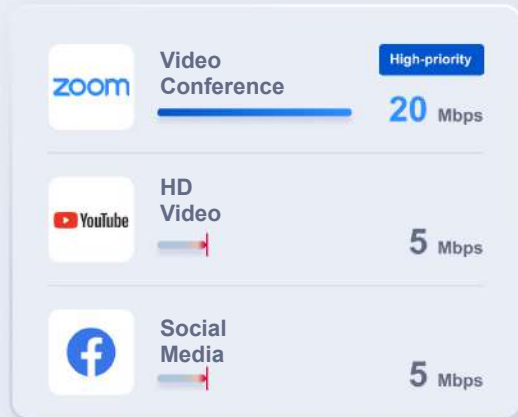

User Based Bandwidth Policy

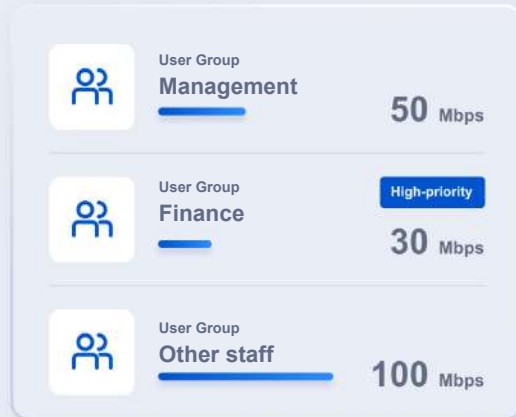

Cloud, Make Your Business Easy

- Reeye free DDNS
- Cloud portal authentication
- Remote monitoring and maintenance
- Upgrade firmware via Cloud
- APP library dynamic update



Specifications

Hardware Specifications

Hardware Basic

Service Ports	5 x 10/100/1000 Base-T (1 fixed WAN, 1 fixed LAN, 3 LAN/WAN switchable) 1 x USB 3.0
SDRAM/RAM	512 MB
Flash Memory	128 MB
Radio Design	2.4GHz, 2×2, MU-MIMO 5GHz, 2×2, MU-MIMO
Standard & Protocol	Wi-Fi 6 (IEEE 802.11ax) Wi-Fi 5 (IEEE 802.11ac Wave 2) Wi-Fi 4 (IEEE 802.11n) IEEE 802.11a IEEE 802.11b/g
Operation Frequency Bands	802.11b/g/n/ax: 2.400 GHz to 2.4835 GHz 802.11a/n/ac/ax: 5.150 GHz to 5.350 GHz, 5.470 GHz to 5.725 GHz , 5.725 GHz to 5.850 GHz country-specific restrictions apply Egypt: 802.11b/g/n: 2.4 GHz ~ 2.4835 GHz 802.11a/n/ac: 5.150 GHz ~ 5.350 GHz
Antenna	5 External Antennas (2.4 GHz: 5 dBi, 5 GHz: 5 dBi)
Wireless Data Rate	2.4 GHz: 574 Mbps 5 GHz: 2402 Mbps
Max Transmit Power	5725 MHz to 5850 MHz: 33 dBm (EIRP) 5150 MHz to 5350 MHz: 23 dBm (EIRP) 2400 MHz to 2483.5 MHz: 20 dBm (EIRP) Myamar: 2400 MHz~2483.5 MHz ≤ 20 dBm 5150 MHz~5350 MHz ≤ 23 dBm 5470 MHz~5850 MHz ≤ 25 dBm Thailand: 2400 MHz~2483.5 MHz ≤ 20 dBm 5150 MHz~5350 MHz ≤ 23 dBm 5470 MHz~5725 MHz ≤ 25 dBm 5725 MHz~5850 MHz ≤ 30 dBm Egypt: 2400 MHz~2483.5 MHz ≤ 20 dBm (EIRP) 5150 MHz~5350 MHz ≤ 20 dBm (EIRP)

Specifications

Basic Feature

Modulation	OFDM: BPSK@6/9 Mbps, QPSK@12/18 Mbps, 16QAM@24 Mbps, 64QAM@48/54 Mbps DSSS: DBPSK@1 Mbps, DQPSK@2 Mbps, and CCK@5.5/11 Mbps MIMO-OFDM: BPSK, QPSK, 16QAM, 64QAM, 256QAM and 1024QAM OFDMA
------------	---

Recommended maximum Clients	Recommended total clients: 180
	Recommended wireless clients: 80

Recommended ISP Bandwidth	1.2 Gbps
---------------------------	----------

Local Power Supply	100V~240V AC, 50/ 60Hz
--------------------	------------------------

Max Power Consumption	20 W
-----------------------	------

Physical Parameters

Dimensions (W x D x H)	283 mm × 172 mm × 46 mm (11.14 in. × 6.77 in. × 1.81 in.) Note: The value (46 mm/1.81 in.) only indicates the height of the main unit, excluding that of the antenna.
------------------------	--

Weight	≤ 2 kg (4.41 lbs)
--------	-------------------

Operating Temperature	0°C to 40°C (32°F to 104°F)
-----------------------	-----------------------------

Storage Temperature	−40°C to 70°C (−40°F to 158°F)
---------------------	--------------------------------

Operating Humidity	5% RH to 95% RH (non-condensing)
--------------------	----------------------------------

Storage Humidity	5% RH to 95% RH (non-condensing)
------------------	----------------------------------

Software Specifications

Basic Features

Internet Access Mode	PPPoE Client DHCP Client Static IP
----------------------	--

Access Mode Auto-Identification	✓
---------------------------------	---

WAN IP Address Conflict Avoidance	✓
-----------------------------------	---

PPPoE Account and Password Learned from Other Routers	✓
---	---

Specifications

Software Specifications

VLAN	8
IPv6	✓
Network Management	
IPTV	✓
AC Mode	✓
Behavior Management	App Block (Time/IP-based Policy) Website Filtering
Application Identification	Identify 100+ Applications, including Office, IM, Web Page, Online Shopping, Online Gaming, P2P Download and Popular Videos
Application Priority	✓
Flow Control	Smart Flow Control Custom flow Control Policies IP-based Automatic Bandwidth Assignment
Traffic Audit	Real-time Traffic Audit
Fault Diagnosis	✓
Marketing Authentication	WiFiDog (SMS Authentication and One-click Authentication)
Local Authentication	Portal Authentication Password Authentication QR Code Authentication
VPN	
L2TP VPN	✓
PPTP VPN	✓
IPsec VPN	✓
OpenVPN	✓
PPTP&L2TP&OpenVPN Accounts	100
IPsec VPN Performance	28 Mbps
L2TP VPN Performance	190 Mbps

Specifications

Software Specifications

OpenVPN Performance 20 Mbps

IPsec VPN Tunnels	8
-------------------	---

OpenVPN Tunnels	16
-----------------	----

L2TP VPN Tunnels	8
------------------	---

Routing

Static Routing	✓
----------------	---

RIP/RIPng	✓
-----------	---

Policy-based Routing	✓
----------------------	---

Active/Standby Switchover	✓
---------------------------	---

WAN Port Load Balancing	✓
-------------------------	---

IP-based Load Balancing	✓
-------------------------	---

Flow-based Load Balancing	✓
---------------------------	---

Load Balancing Based on Weights of Member Interfaces	✓
--	---

ISP Routing	✓
-------------	---

Networks

PPPoE Client	✓
--------------	---

PPPoE Server	✓
--------------	---

DHCP Server	✓
-------------	---

DNS Client	✓
------------	---

DNS Server	✓
------------	---

DNS Proxy	✓
-----------	---

NTP Client	✓
------------	---