

RG-RAP6262

Wi-Fi 6 AX3000 High Performance Outdoor Access Point

DATASHEET



Highlights

- 'UFO' design, a perfect blend of high performance and full coverage.
- Enter the era of ultra-high Wi-Fi 6 speed.
- Extra-distance access point deployment with SFP port.
- IP68 protection, rock-solid in harsh environments.
- Easily expand extra outdoor Wi-Fi with Reyee Mesh.

Highlight Features

A Perfect Blend of High Performance and Full Coverage



Wi-Fi 6
AX3000



Omni-directional
Antennas



SFP
Port



Reyee
Mesh



Free Cloud
Management

Enter the Era of Ultra-high Wi-Fi 6 Speed

With a revolutionary combination of **OFDMA** and **1024QAM**, the latest **802.11ax** standard, and the **160MHz** band,

RG-RAP6262 wireless aggregation rate reaches 2.976Gbps.


RG-RAP6262		2976 Mbps
RG-RAP6262(G)		1775Mbps



Highlight Features

Support Extra-Distance Access Point Deployment

With gigabit SFP port, the device supports up to 20km transmission from datacenter with single mode fiber

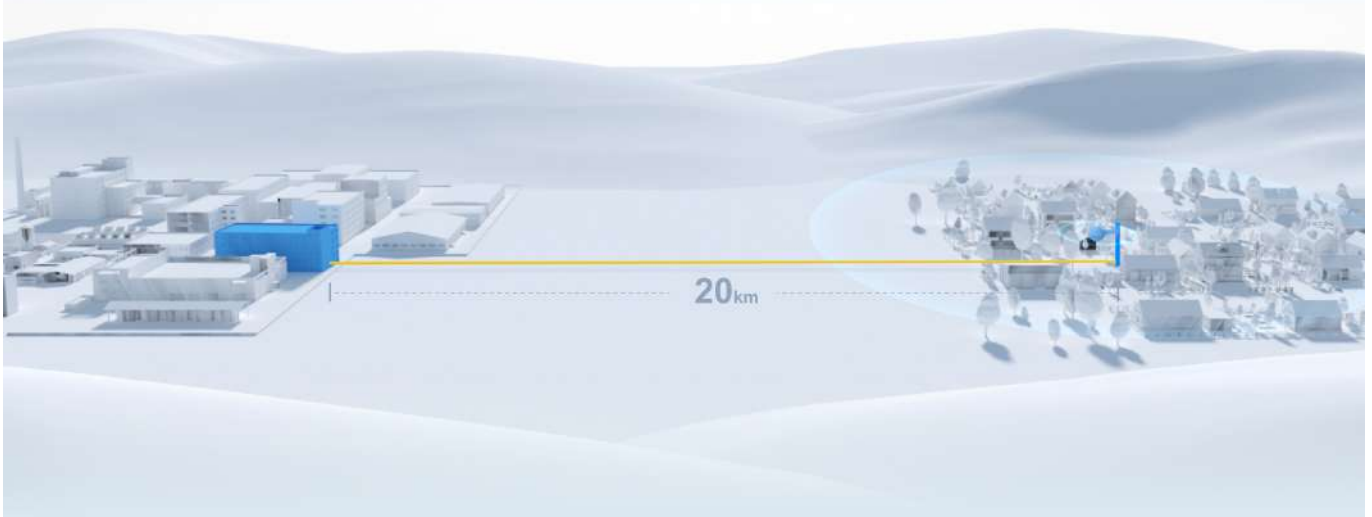

Rock-solid in Harsh Environments

Adopts completely sealed, waterproof, dustproof, moisture proof and flame-retardant, wind erosion protection, Wide Temperature range, and 4kV surge protection design.



IP68
Protection



4kV Lighting
Protection



Wind Erosion
Protection



-30°C ~ 65°C
Flame-Retardant

Highlight Features

Omni-directional Coverage with Long Range

Built-in 5 high gain antennas, supports full coverage with radius of 100 meters at 2.4GHz, and 300 meters at 5GHz*.



Easily Expand Extra Outdoor Wi-Fi with Reyee Mesh

Less wiring, more relaxing



Highlight Features

Easy Installation, Firmly Fixed

Rack-separated mounting design, easily installation on high. Replace plastic cable ties by iron hoop.



Cloud, Make Your Business Easy

- Remote monitoring
- Remote Wi-Fi management
- Cloud portal authentication
- Wireless intelligent optimization



/ Specifications

Basic Feature

Wi-Fi Standards	Wi-Fi 6 (IEEE 802.11ax) Wi-Fi 5 (IEEE 802.11ac Wave 2) Wi-Fi 4 (IEEE 802.11n) IEEE 802.11a IEEE 802.11b/g
MIMO	2.4GHz, 2×2, MU-MIMO 5GHz, 2×2, MU-MIMO
Max. Wi-Fi Speed	2.4GHz: 574Mbps 5GHz: 2402Mbps
Antenna	5
Antenna Type	Built-In Omnidirectional
Antenna Gain	2.4GHz: 3dBi 5 GHz: 4dBi
Transmit Power	EIRP: ≤32dBm (2.4GHz) ≤34.7dBm (5GHz) country-specific restrictions apply Myanmar: 2400 MHz~2483.5 MHz ≤ 20 dBm 5150 MHz~5350 MHz ≤ 23 dBm 5470 MHz~5850 MHz ≤ 25 dBm Thailand: 2400 MHz~2483.5 MHz ≤ 20 dBm 5150 MHz~5350 MHz ≤ 23 dBm 5470 MHz~5725 MHz ≤ 25 dBm 5725 MHz~5850 MHz ≤ 30 dBm
Fixed Ports	1 × 10/100/1000 Base-T port 1 × 1GBase-X SFP port 1 × DC port 1 × Reset button
Max. Clients	512
Recommended Clients	110
Max. SSIDs	8
Recommended Wi-Fi Coverage Radius	2.4GHz: 50 meters 5GHz: 150 meters The Wi-Fi coverage is related to the installation environment of the access point.

Specifications

Basic Feature

Max. Wi-Fi Coverage Radius

300 Meters

Operation Frequency Bands

802.11b/g/n/ax: 2.400 GHz to 2.4835 GHz
802.11a/n/ac/ax: 5.150 GHz to 5.350 GHz, 5.470 GHz to 5.725 GHz,
5.725 GHz to 5.850 GHz
country-specific restrictions apply

Software Feature

WLAN Basic Features

Power Adjustment

✓

Frequency Bandwidth

2.4 GHz: Auto/20/40 MHz
5 GHz: Auto/20/40/80/160 MHz

Roaming

Layer 2 roaming
Layer 3 roaming

OFDMA

✓

Beamforming

✓

WMM

✓

Radar Signal Detection and
Frequency Hopping (DFS)

✓

WLAN Security

Wi-Fi Password

16 Digits

Security Mode

WPA-PSK, WPA2-PSK, WPA/WPA2-PSK

Blacklist and Whitelist

✓

Enhanced User Experience

Wi-Fi Optimization

✓

STA Limit

✓

Removing Low-RSSI STAs

✓

Adjusting Sending Rate
of Beacon and Probe
Response

✓

Specifications

Software Feature	
Syslog Recording Why Users Lose Connection	✓
Auto Channel and Power Adjustment on Cloud	✓
RSSI Threshold for STA Access	✓
Load Balancing	✓
Networks	
Network Access Mode	PPPoE Client DHCP Client Static IP
VLAN	✓
DHCP Server	✓
System	
Cloud Management	✓
APP Management	✓
APP Upgrade	✓
APP Restart	✓
Scheduled Restart	✓
Default Access/Password	10.44.77.253 No Password Required by Default
Local Upgrade	✓
Online Upgrade	✓
Dual-bin Backup	✓
Factory Reset	✓
Language	Chinese English
System Log	✓

Specifications

System

Diagnostics



Network Check



Physical

LED Indicator

1 × System LED indicator
1 × Wi-Fi LED indicator
1 × SFP LED indicator
1 × LAN LED indicator

Buttons

1 × Reset button

Dimensions (W × D × H)

230 mm x 230 mm x 195 mm (Without Mounting Bracket)

Weight

≤1.4 kg (Without Mounting Bracket)

DC Port Dimensions

Outer Diameter: 5.5 mm
Inner Diameter: 2.1 mm
Length: 10 mm

Installation

Wall-Mountable/Pole-Mountable

Mounting Bracket
Dimensions (W × D × H)

155mm x 129mm x 35mm

Mounting Hole Pattern

65 mm x 110 mm

Mounting Hole Diameter

9 mm

Pole Diameter

70 mm to 140 mm

Power Supplies

IEEE 802.3at PoE
DC 12V/2A

Power Consumption

< 24W

PoE Power Budget

NA

Environmental

Operating Temperature

-30°C ~ 65°C

Storage Temperature

-40°C ~ 85°C

Operating Humidity

0% ~ 100% Noncondensing

Specifications

Physical

Storage Humidity 0% ~ 100% Noncondensing




IP(Ingress Protection) IP68

Port Surge 4kV




MTBF > 400000H

Antenna Schematic

2.4GHz

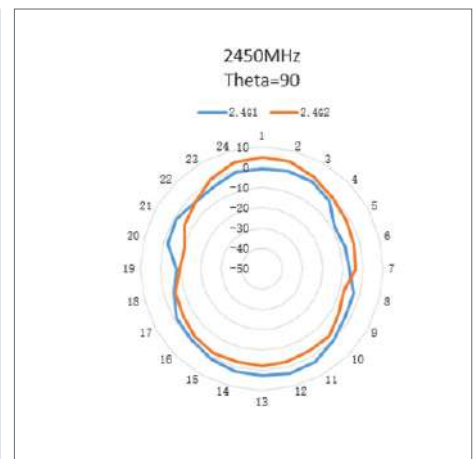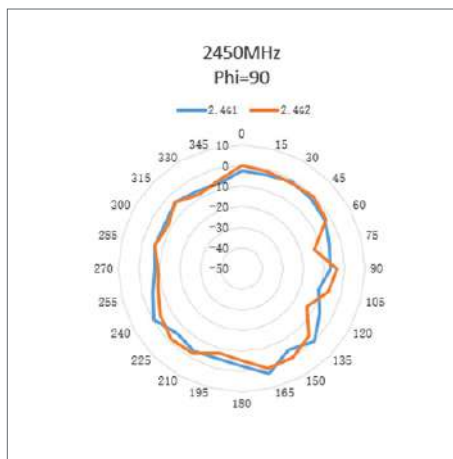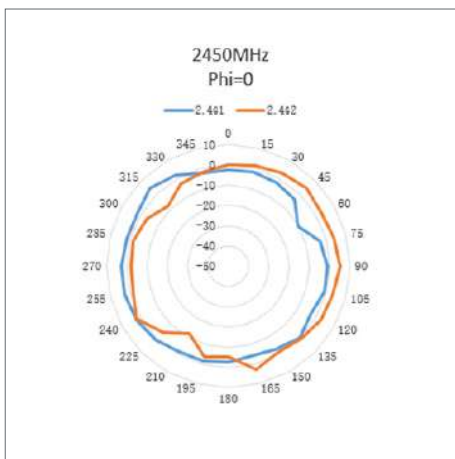

5GHz

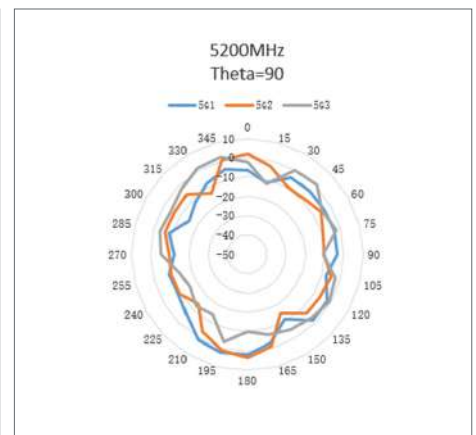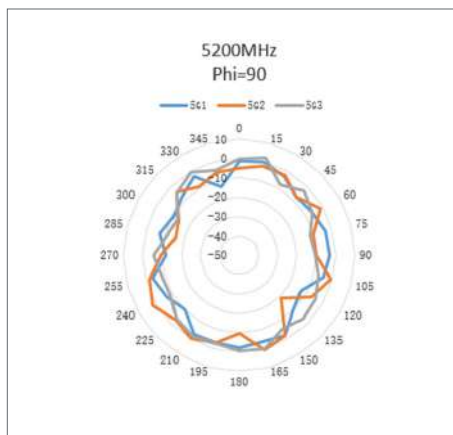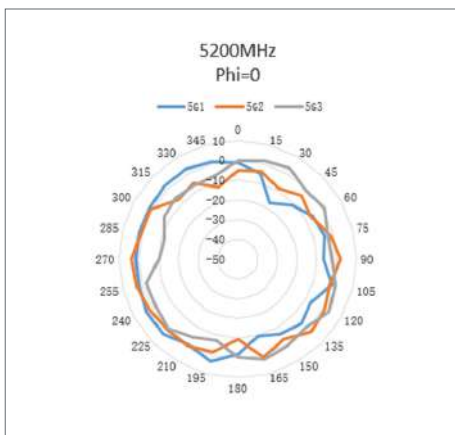

Package Contents

Package Information	RG-RAP6262
Access Point	1
Power Adapter	0
Quick Start Guide	1
Cat5E UTP Cable	0
Mounting Bracket	1
Rack-mount Brackets	1
Screw	2 × M8×20 4 × M8×60
Warranty Card	1
Package Weight	4.62 kg
Package Dimension (w x d x h)	475 mm x 305 mm x 270 mm

Ruijie | Rcycc

 **Redefine your easy network**

Copyright ©2000-2022 Ruijie Networks Co., Ltd. All rights reserved.

No part of this document may be reproduced or transmitted in any form or any means without prior written consent of Ruijie Networks Co., Ltd.

Notice

This content is applicable only to regions outside the China mainland. Ruijie Networks Co., Ltd. reserves the right to interpret this content.

The information contained herein is subject to change without notice. Nothing herein should be construed as constituting an additional warranty. Ruijie Networks Co., Ltd. shall not be liable for technical or editorial errors or omissions contained herein.



Ruijie Networks Co., Ltd
Floor 11, East Wing, Zhongyipengao Plaza,
No.29 Fuxing Road, Haidian District, Beijing China
Website: <https://www.ruijienetworks.com>